

FEATURES

- ▶ Industrial Standard DIP-16 Package
- ▶ Ultra-high I/O Isolation 8000VDC with Reinforced Insulation, rate for 300Vrms Working Voltage
- ▶ Common Mode Transient Immunity:15KV/μs
- ▶ Qualified for IGBT and High Isolation Applications
- ▶ Operating Ambient Temp. Range -25°C to +80°C
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval

NEW

PRODUCT OVERVIEW

The MINMAX MDEU02-HI series is a new range of isolated 2W DC/DC converter modules in DIP-16 package which feature a Ultra-high I/O-isolation voltage rated for 8000VDC with reinforced insulation. A very high common mode transient immunity with 15KV/μs qualifies these product for IGBT driver applications. There are 15 Models available for 5, 12, and 24VDC input. These converters offer a cost-effective solution for wind turbine, solar panel, transportation systems, industrial control equipments and some IGBT driver applications where a very high I/O-isolation is required.

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current | | Input Current | | Load Regulation % (max.) | Max. Capacitive Load μF | Efficiency (typ.) |
|----------------|------------------------------|-----------------------|----------------|------|---------------|-----------|-----------------------------|----------------------------|-------------------|
| | | | Max. | Min. | @Max. Load | @No Load | | | @Max. Load |
| | | | mA | mA | mA (typ.) | mA (typ.) | | | % |
| MDEU02-05S05HI | 5 (4.5 ~ 5.5) | 5 | 400 | 8 | 615 | 60 | 12 | 330 | 65 |
| MDEU02-05S12HI | | 12 | 165 | 3 | 609 | | 10 | | 65 |
| MDEU02-05S15HI | | 15 | 133 | 2.5 | 605 | | 10 | | 66 |
| MDEU02-05D12HI | | ±12 | ±83 | ±1.5 | 553 | | 10 | 100# | 72 |
| MDEU02-05D15HI | | ±15 | ±66 | ±1 | 542 | | 10 | | 73 |
| MDEU02-12S05HI | 12 (10.8 ~ 13.2) | 5 | 400 | 8 | 256 | 30 | 12 | 330 | 65 |
| MDEU02-12S12HI | | 12 | 165 | 3 | 254 | | 10 | | 65 |
| MDEU02-12S15HI | | 15 | 133 | 2.5 | 252 | | 10 | | 66 |
| MDEU02-12D12HI | | ±12 | ±83 | ±1.5 | 224 | | 10 | 100# | 74 |
| MDEU02-12D15HI | | ±15 | ±66 | ±1 | 220 | | 10 | | 75 |
| MDEU02-24S05HI | 24 (21.6 ~ 26.4) | 5 | 400 | 8 | 128 | 15 | 12 | 330 | 65 |
| MDEU02-24S12HI | | 12 | 165 | 3 | 127 | | 10 | | 65 |
| MDEU02-24S15HI | | 15 | 133 | 2.5 | 126 | | 10 | | 66 |
| MDEU02-24D12HI | | ±12 | ±83 | ±1.5 | 112 | | 10 | 100# | 74 |
| MDEU02-24D15HI | | ±15 | ±66 | ±1 | 110 | | 10 | | 75 |

For each output

Input Specifications

| Parameter | Model | Min. | Typ. | Max. | Unit |
|-----------------------------------|------------------|--------------------|------|------|------|
| Input Voltage Range | 5V Input Models | 4.5 | 5 | 5.5 | VDC |
| | 12V Input Models | 10.8 | 12 | 13.2 | |
| | 24V Input Models | 21.6 | 24 | 26.4 | |
| Input Surge Voltage (1 sec. max.) | 5V Input Models | -0.7 | --- | 9 | |
| | 12V Input Models | -0.7 | --- | 18 | |
| | 24V Input Models | -0.7 | --- | 30 | |
| Input Filter | All Models | Internal Capacitor | | | |

Output Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------------------|-------------------------------------|---------------------------|-------|-------|-------------------|
| Output Voltage Setting Accuracy | | --- | ±2.0 | ±4.0 | %Vnom. |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | ±0.1 | ±1.0 | % |
| Line Regulation | Vin=Min. to Max. @Full Load | --- | ±1.2 | ±1.5 | % |
| Load Regulation | Io=20% to 100% | See Model Selection Guide | | | |
| Ripple & Noise | 0-20MHz Bandwidth | --- | --- | 150 | mV _{P-P} |
| Temperature Coefficient | | --- | ±0.01 | ±0.02 | %/°C |
| Short Circuit Protection | 0.5 Second Max., Automatic Recovery | | | | |

Isolation, Safety Standards

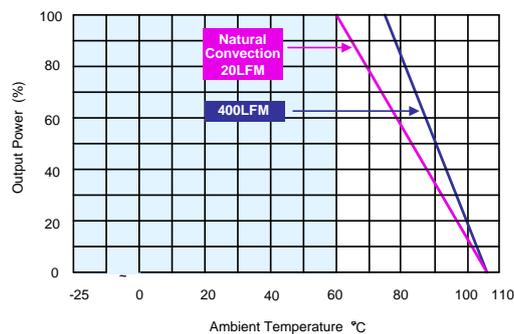
| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|--------------------------------|--|------|------|------|--------|
| I/O Isolation Voltage | 60 Seconds Reinforced insulation, rated for 300Vrms working voltage | 4000 | --- | --- | VACrms |
| | Tested for 1 second | 8000 | --- | --- | VDC |
| I/O Isolation Resistance | 500 VDC | 10 | --- | --- | GΩ |
| I/O Isolation Capacitance | 100KHz, 1V | --- | 15 | 20 | pF |
| Common Mode Transient Immunity | | 15 | --- | --- | KV/μs |
| Safety Approvals | UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1(CB-report) | | | | |

General Specifications

| Parameter | Conditions | Min. | Typ. | Max. | Unit |
|---------------------|-----------------------------------|-----------|------|------|-------|
| Switching Frequency | | 50 | 80 | 100 | KHz |
| MTBF (calculated) | MIL-HDBK-217F@25°C, Ground Benign | 2,000,000 | --- | --- | Hours |

Environmental Specifications

| Parameter | Conditions | Min. | Max. | Unit |
|---|--------------------|------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | Natural Convection | -25 | +80 | °C |
| Case Temperature | | --- | +105 | °C |
| Storage Temperature Range | | -50 | +125 | °C |
| Humidity (non condensing) | | --- | 95 | % rel. H |
| Cooling | Natural Convection | | | |
| Lead Temperature (1.5mm from case for 10Sec.) | | --- | 260 | °C |

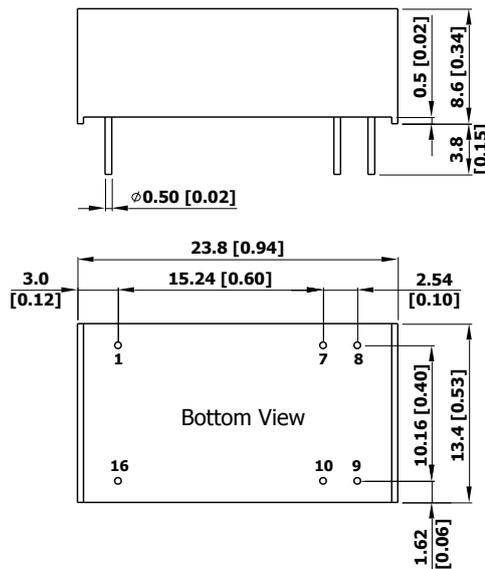
Power Derating Curve


Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 6 Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions



Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|-------------|
| 1 | -Vin | -Vin |
| 7 | NC | NC |
| 8 | NC | Common |
| 9 | +Vout | +Vout |
| 10 | -Vout | -Vout |
| 16 | +Vin | +Vin |

NC: No Connection

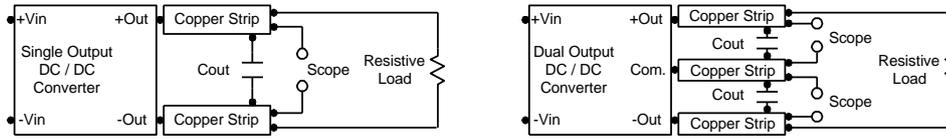
- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pins ±0.05(±0.002)

Physical Characteristics

| | |
|---------------|---|
| Case Size | : 23.8x13.4x8.6mm (0.94x0.53x0.34 inches) |
| Case Material | : Non-Conductive Black Plastic (flammability to UL 94V-0 rated) |
| Pin Material | : Copper Alloy with Gold Plate Over Nickel Subplate |
| Weight | : 5.1g |

Test Setup
Peak-to-Peak Output Noise Measurement Test

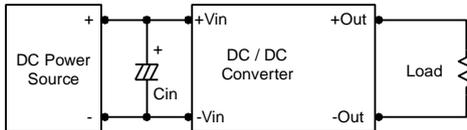
Use a Cout 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.


Technical Notes
Maximum Capacitive Load

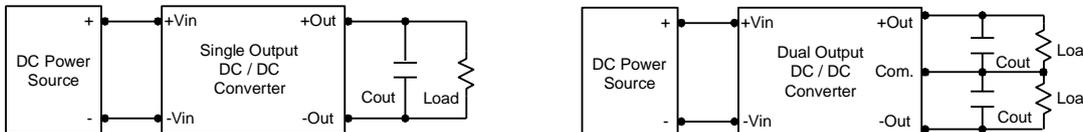
The MDEU02-HI series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. For optimum performance we recommend 100 μ F maximum capacitive load for dual outputs and 330 μ F capacitive load for single outputs. The maximum capacitance can be found in the data sheet.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 KHz) capacitor of a 2.2 μ F for the 5V input devices, a 1.0 μ F for the 12V input devices and a 0.47 μ F for the 24V input devices.


Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.


Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

