

## FEATURES

- ▶ Smallest Encapsulated 50W Converter
- ▶ Ultra-compact 2" X 1" Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ Excellent Efficiency up to 92%
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage/Temp. and Short Circuit Protection
- ▶ Remote On/Off Control, Output Voltage Trim
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking



COMPLIANT



## PRODUCT OVERVIEW

The MINMAX MKW50 series is the latest generation of high performance dc-dc converter modules setting a new standard concerning power density. The product offers fully 50W in an encapsulated, shielded metal package with dimensions of just 2.0"x1.0"x0.4". All models provide wide 2:1 input voltage range and precisely regulated output voltages.

Advanced circuit topology provides a very high efficiency up to 92% which allows an operating temperature range of -40°C to +80°C . Further features include remote On/Off, trimmable output voltage, under-voltage shutdown as well as overload and over-temperature protection.

Typical applications for these converters are battery operated equipment, instrumentation, distributed power architectures in communication and industrial electronics and many other space critical applications.

### Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current			Reflected Ripple Current	Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)	
				Max.	@Max. Load	@No Load					
				VDC	VDC	mA	mA(typ.)	mA	mA(typ.)	%	
MKW50-12S033	12 ( 9 ~ 18 )	3.3	10000	3090	85		50	50	3.9	25800	89
MKW50-12S05		5	10000	4630	110				6.2	17000	90
MKW50-12S12		12	4170	4580	160				15	2900	91
MKW50-12S15		15	3330	4580	160				18	1900	91
MKW50-12S24		24	2080	4570	250				30	750	91
MKW50-24S033	24 ( 18 ~ 36 )	3.3	10000	1550	50		40	40	3.9	25800	89
MKW50-24S05		5	10000	2260	70				6.2	17000	92
MKW50-24S12		12	4170	2260	85				15	2900	92
MKW50-24S15		15	3330	2260	85				18	1900	92
MKW50-24S24		24	2080	2290	110				30	750	91
MKW50-48S033	48 ( 36 ~ 75 )	3.3	10000	770	35		30	30	3.9	25800	89
MKW50-48S05		5	10000	1130	45				6.2	17000	92
MKW50-48S12		12	4170	1130	50				15	2900	92
MKW50-48S15		15	3330	1130	50				18	1900	92
MKW50-48S24		24	2080	1150	60				30	750	91

### Input Specifications

Parameter		Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (100ms. max)	12V Input Models	-0.7	---	25		VDC
	24V Input Models	-0.7	---	50		
	48V Input Models	-0.7	---	100		
Start-Up Threshold Voltage	12V Input Models	---	---	9		
	24V Input Models	---	---	18		
	48V Input Models	---	---	36		
Under Voltage Shutdown	12V Input Models	---	8.3	---		
	24V Input Models	---	16.5	---		
	48V Input Models	---	33	---		
Start Up Time	Power Up	Nominal Vin and Constant Resistive Load	---	---	30	ms
	Remote On/Off		---	---	30	ms
Input Filter		All Models	Internal LC Type			

**Remote On/Off Control**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Converter On	3.5V ~ 12V or Open Circuit				
Converter Off	0V ~ 1.2V or Short Circuit				
Control Input Current (on)	Vctrl = 5.0V	---	0.5	---	mA
Control Input Current (off)	Vctrl = 0V	---	-0.5	---	mA
Control Common	Referenced to Negative Input				
Standby Input Current	Nominal Vin	---	2.5	---	mA

**Output Specifications**

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	---	±1.0	%Vnom.
Line Regulation	Vin=Min. to Max. @ Full Load	---	---	±0.5	%
Load Regulation	Io=0% to 100%	---	---	±0.5	%
Minimum Load	No minimum Load Requirement				
Ripple & Noise	0-20 MHz Bandwidth 3.3V & 5V Models <sup>(3)</sup> 12V, 15V & 24V Models <sup>(3)</sup>	---	---	100	mV P-P
Transient Recovery Time	25% Load Step Change <sup>(2)</sup>	---	250	---	μsec
Transient Response Deviation		---	±3	±5	%
Temperature Coefficient		---	---	±0.02	%/°C
Trim Up / Down Range (See Page 8)	% of Nominal Output Voltage 24Vo Models Other Models	---	---	+20 / -10	%
Over Load Protection	Hiccup	---	150	---	%
Short Circuit Protection	24Vo Models Other Models	Hiccup Mode 0.3Hz typ. Automatic Recovery			
		Hiccup Mode 1.5Hz typ. Automatic Recovery			

**General Specifications**

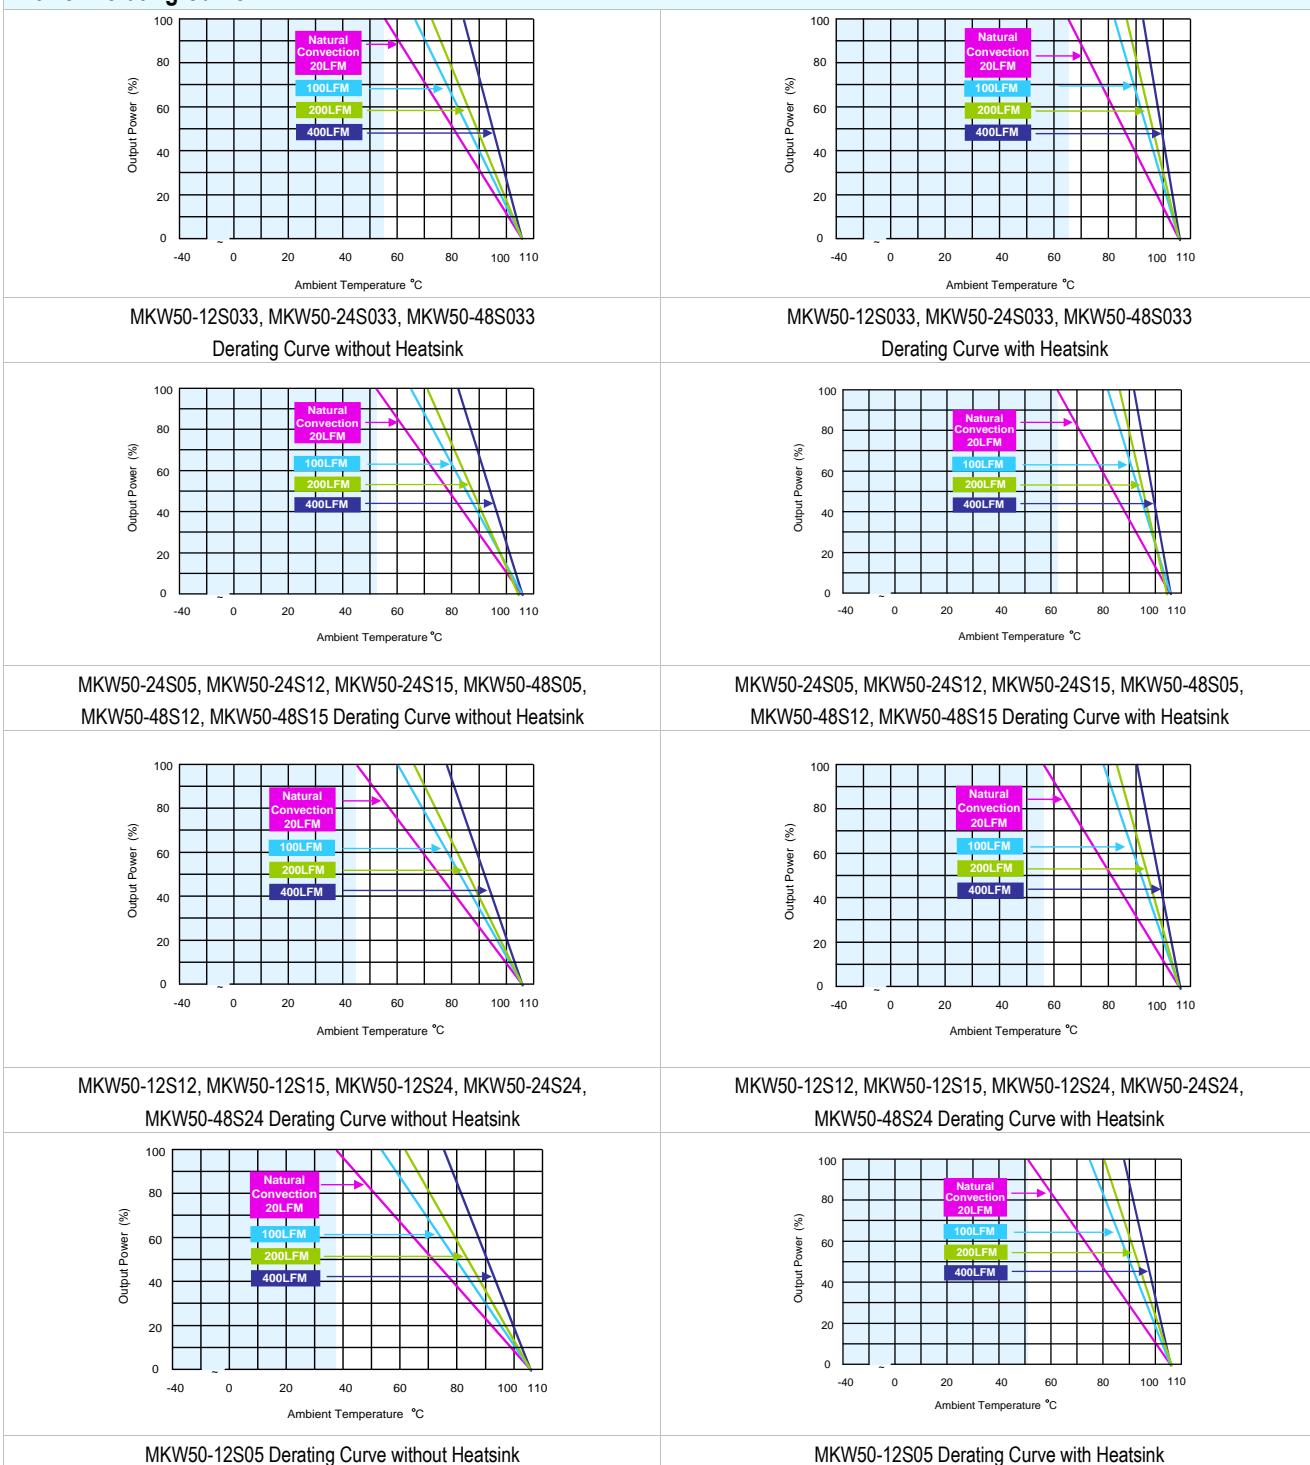
Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	1500	---	---	VDC
	1 Second	1800	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	---	2200	pF
Switching Frequency	24Vo Models	---	285	---	KHz
	Other Models	---	320	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	224,700			Hours
Safety Approvals	UL/cUL 60950-1 recognition (CSA certificate), IEC/EN 60950-1(CB-report)				









**Environmental Specifications**








Parameter	Conditions / Model	Min.	Max.		Unit
			without Heatsink	with Heatsink	
Operating Ambient Temperature Range Natural Convection <sup>(9)</sup> Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MKW50-XXS033	-40	56	64	°C
	MKW50-24S05, MKW50-24S12		53	62	
	MKW50-24S15, MKW50-48S05				
	MKW50-48S12, MKW50-48S15				
	MKW50-12S12, MKW50-12S15				
	MKW50-12S24, MKW50-24S24		46	56	
	MKW50-48S24				
	MKW50-12S05		38	49	
Thermal Impedance	Natural Convection without Heatsink	12.1	---	---	°C/W
	Natural Convection with Heatsink	9.8	---	---	°C/W
	100LFM Convection without Heatsink	9.2	---	---	°C/W
	100LFM Convection with Heatsink	5.4	---	---	°C/W
	200LFM Convection without Heatsink	7.8	---	---	°C/W
	200LFM Convection with Heatsink	4.5	---	---	°C/W
	400LFM Convection without Heatsink	5.2	---	---	°C/W
	400LFM Convection with Heatsink	3.0	---	---	°C/W
Case Temperature		---	+105	---	°C
Thermal Protection	Shutdown Temperature	110°C typ.			
Storage Temperature Range		-50	+125	---	°C
Humidity (non condensing)		---	95	---	% rel. H
Cooling	Natural Convection				
RFI	Six-Sided Shielded, Metal Case				
Lead Temperature (1.5mm from case for 10Sec.)		---	260	---	°C

**EMC Specifications**

Parameter	Standards & Level		Performance
EMI	Conduction	EN55032, FCC part 15	Class A (6)
	EN55024		
	ESD	EN61000-4-2 Air $\pm 8\text{kV}$ , Contact $\pm 6\text{kV}$	A
EMS	Radiated immunity	EN61000-4-3 10V/m	A
	Fast transient (7)	EN61000-4-4 $\pm 2\text{kV}$	A
	Surge (7)	EN61000-4-5 $\pm 1\text{kV}$	A
	Conducted immunity	EN61000-4-6 10Vrms	A

**Power Derating Curve**

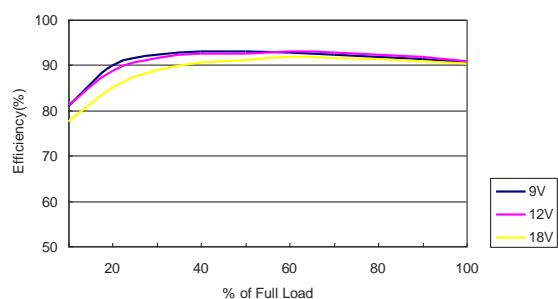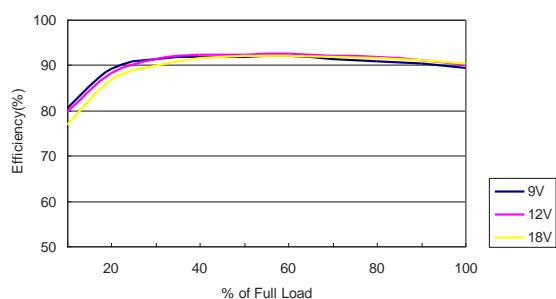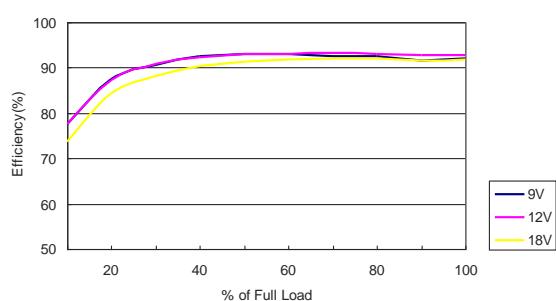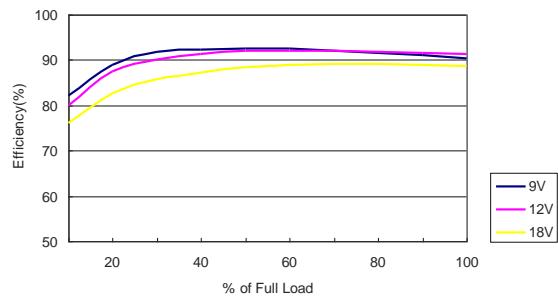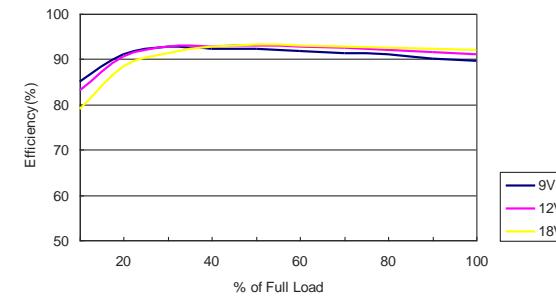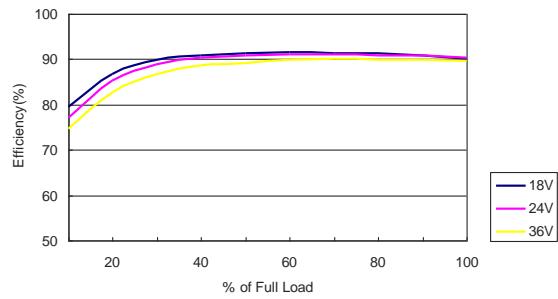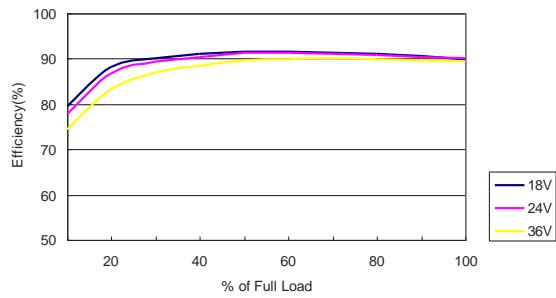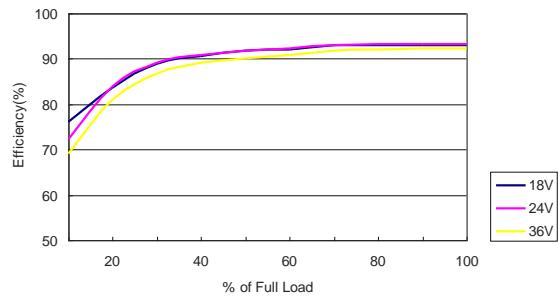
**Efficiency Curve @25°C**

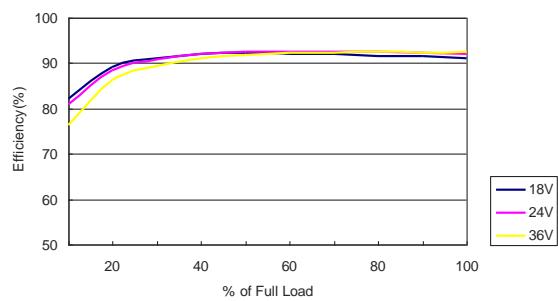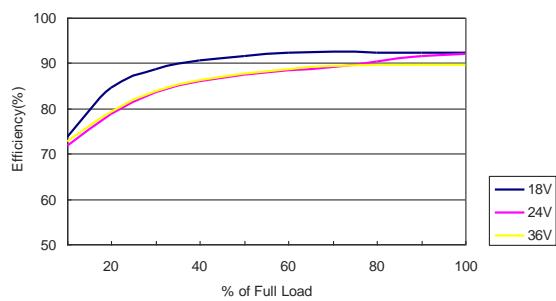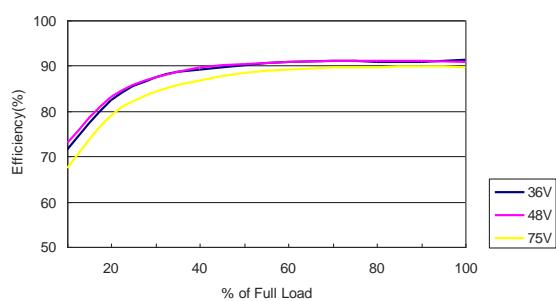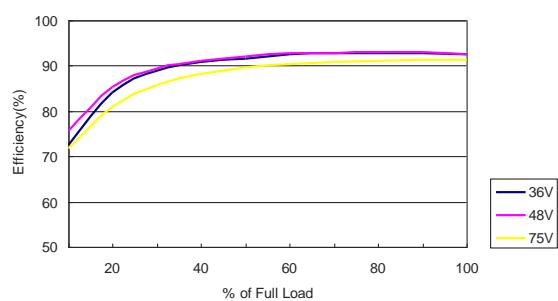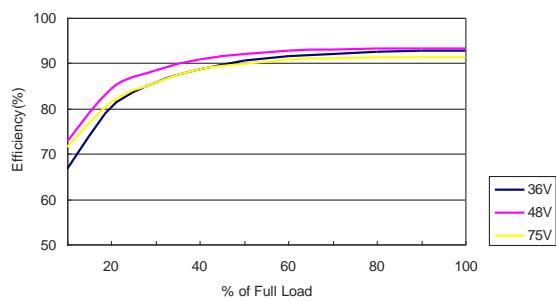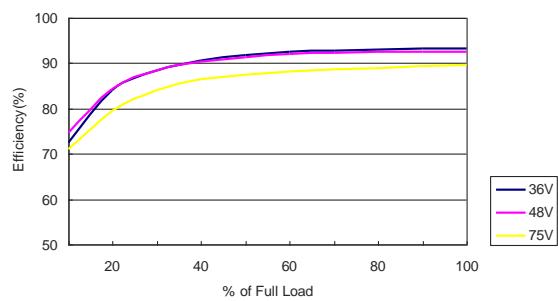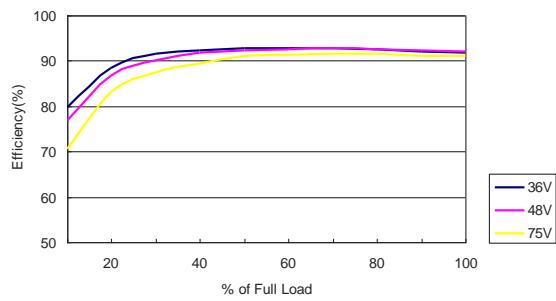**MKW50-12S033 Efficiency vs Load Current**

**MKW50-12S05 Efficiency vs Load Current**

**MKW50-12S12 Efficiency vs Load Current**

**MKW50-12S15 Efficiency vs Load Current**

**MKW50-12S24 Efficiency vs Load Current**

**MKW50-24S033 Efficiency vs Load Current**

**MKW50-24S05 Efficiency vs Load Current**
**MKW50-24S12 Efficiency vs Load Current**

**Efficiency Curve @25°C**

**MKW50-24S15 Efficiency vs Load Current**

**MKW50-24S24 Efficiency vs Load Current**

**MKW50-48S033 Efficiency vs Load Current**

**MKW50-48S05 Efficiency vs Load Current**

**MKW50-48S12 Efficiency vs Load Current**

**MKW50-48S15 Efficiency vs Load Current**


**MKW50-48S24 Efficiency vs Load Current**

## Notes

- 1 Specifications typical at  $T_a=+25^\circ\text{C}$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement with a  $1\mu\text{F}$  MLCC and a  $10\mu\text{F}$  Tantalum Capacitor.
- 4 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 5 Other input and output voltage may be available, please contact factory.
- 6 The MKW50 series can meet EN55032 Class A with parallel an external capacitor to the input pins. (12Vin:  $22\mu\text{F}/25\text{V}$  1210 MLCC, 24Vin:  $3.3\mu\text{F}/50\text{V}$  1210 MLCC, 48Vin:  $2.2\mu\text{F}/100\text{V}$  1210 MLCC).
- 7 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required. Suggested capacitor:  $330\mu\text{F}/100\text{V}$ .
- 8 Do not exceed maximum power specification when adjusting output voltage.
- 9 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 10 Specifications are subject to change without notice.

## Package Specifications
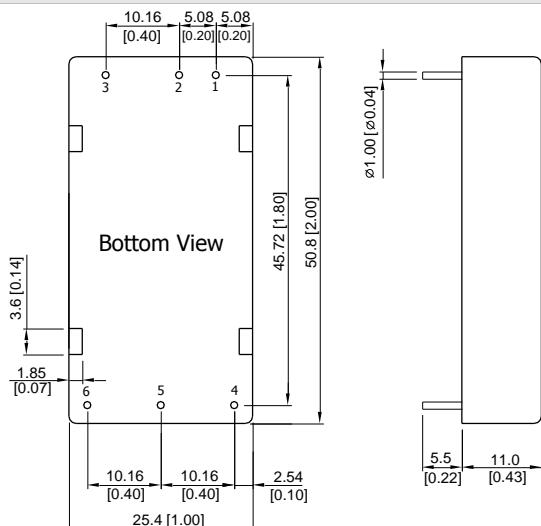
### Mechanical Dimensions




### Pin Connections

Pin	Function
1	+Vin
2	-Vin
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

- All dimensions in mm (inches)
- Tolerance:  $X.X \pm 0.25$  ( $X.XX \pm 0.01$ )
- $X.XX \pm 0.13$  ( $X.XXX \pm 0.005$ )
- Pin diameter  $\varnothing 1.0 \pm 0.05$  ( $0.04 \pm 0.002$ )

## Physical Characteristics

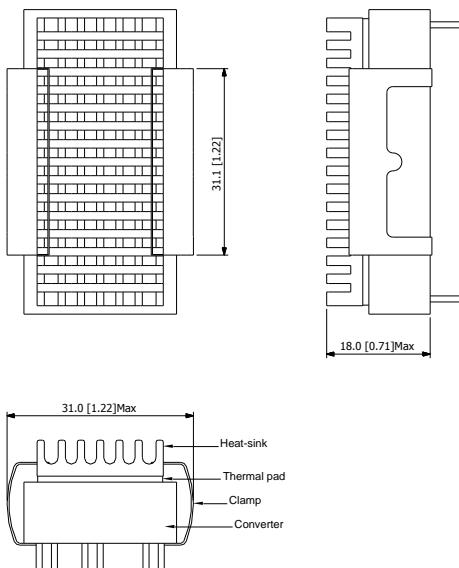Case Size	: 50.8x25.4x11.0mm (2.0x1.0x0.43 inches)
Case Material	: Aluminium Alloy, Black Anodized Coating
Base Material	: FR4 PCB (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Potting Material	: Epoxy (UL94-V0)
Weight	: 30g

**Heatsink (Option -HS)**

**Physical Characteristics**

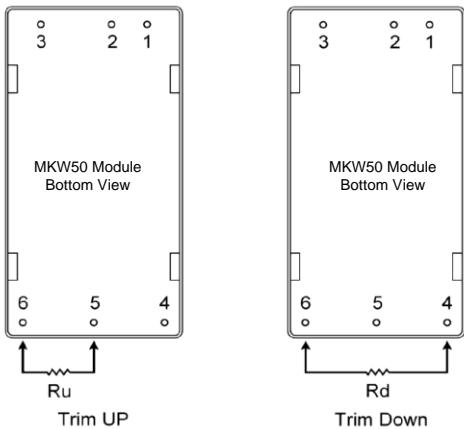
Heatsink Material	:	Aluminum
Finish	:	Black Anodized Coating
Weight	:	9g

► The advantages of adding a heatsink are:

1. To improve heat dissipation and increase the stability and reliability of the DC/DC converters at high operating temperatures.
2. To increase operating temperature of the DC/DC converter, please refer to Derating Curve.

### External Output Trimming

Output can be externally trimmed by using the method shown below



**MKW50-XXS033 Trim Table**

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	72.61	32.55	19.20	12.52	8.51	5.84	3.94	2.51	1.39	0.50	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	60.84	27.40	16.25	10.68	7.34	5.11	3.51	2.32	1.39	0.65	KOhms

**MKW50-XXS05 Trim Table**

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	138.88	62.41	36.92	24.18	16.53	11.44	7.79	5.06	2.94	1.24	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	106.87	47.76	28.06	18.21	12.30	8.36	5.55	3.44	1.79	0.48	KOhms

**MKW50-XXS12 Trim Table**

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	413.55	184.55	108.22	70.05	47.15	31.88	20.98	12.80	6.44	1.35	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	351.00	157.50	93.00	60.75	41.40	28.50	19.29	12.37	7.00	2.70	KOhms

**MKW50-XXS15 Trim Table**

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	530.73	238.61	141.24	92.56	63.35	43.87	29.96	19.53	11.41	4.92	KOhms
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox1.01	Vox1.02	Vox1.03	Vox1.04	Vox1.05	Vox1.06	Vox1.07	Vox1.08	Vox1.09	Vox1.10	Volts
Ru=	422.77	189.89	112.26	73.44	50.15	34.63	23.54	15.22	8.75	3.58	KOhms

**MKW50-XXS24 Trim Table**

Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout=	Vox0.99	Vox0.98	Vox0.97	Vox0.96	Vox0.95	Vox0.94	Vox0.93	Vox0.92	Vox0.91	Vox0.90	Volts
Rd=	333.39	148.80	87.26	56.50	38.04	25.73	16.94	10.35	5.22	1.12	KOhms
Trim up	2	4	6	8	10	12	14	16	18	20	%
Vout=	Vox1.02	Vox1.04	Vox1.06	Vox1.08	Vox1.1	Vox1.12	Vox1.14	Vox1.16	Vox1.18	Vox1.2	Volts
Ru=	243.70	108.50	63.43	40.90	27.38	18.37	11.93	7.10	3.34	0.34	KOhms

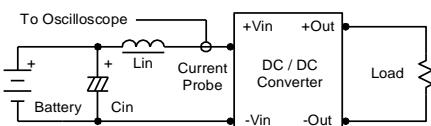
**Order Code Table**

Standard	With heatsink
MKW50-12S033	MKW50-12S033-HS
MKW50-12S05	MKW50-12S05-HS
MKW50-12S12	MKW50-12S12-HS
MKW50-12S15	MKW50-12S15-HS
MKW50-12S24	MKW50-12S24-HS
MKW50-24S033	MKW50-24S033-HS
MKW50-24S05	MKW50-24S05-HS
MKW50-24S12	MKW50-24S12-HS
MKW50-24S15	MKW50-24S15-HS
MKW50-24S24	MKW50-24S24-HS
MKW50-48S033	MKW50-48S033-HS
MKW50-48S05	MKW50-48S05-HS
MKW50-48S12	MKW50-48S12-HS
MKW50-48S15	MKW50-48S15-HS
MKW50-48S24	MKW50-48S24-HS

## Test Setup


### Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor Lin (4.7 $\mu$ H) and Cin (220 $\mu$ F, ESR < 1.0 $\Omega$  at 100 KHz) to simulate source impedance. Capacitor Cin, offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 KHz.



### Peak-to-Peak Output Noise Measurement Test

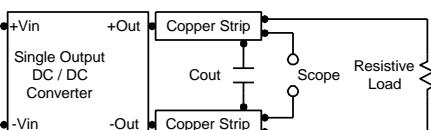Use a 1 $\mu$ F ceramic capacitor and a 10 $\mu$ F tantalum capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.



## Technical Notes

### Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal. The switch can be an open collector or equivalent. A logic low is 0V to 1.2V. A logic high is 3.5V to 12V. The maximum sink current at the on/off terminal (Pin 3) during a logic low is -100 $\mu$ A.

### Overload Protection

To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

### Overshoot Protection

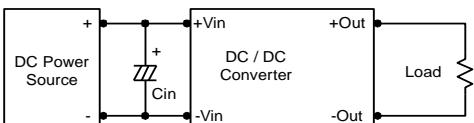
The output overshoot clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overshoot. The OVP level can be found in the output data.

### Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.


In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 $\Omega$  at 100 KHz) capacitor of a 33 $\mu$ F for the 12V input devices and a 10 $\mu$ F for the 24V and 48V devices.



### Output Ripple Reduction

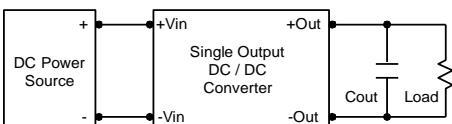A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 $\mu$ F capacitors at the output.



### Maximum Capacitive Load

The MKW50 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

### Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.

